
SKID STEERS

SPECIFICATIONS v.01/2013



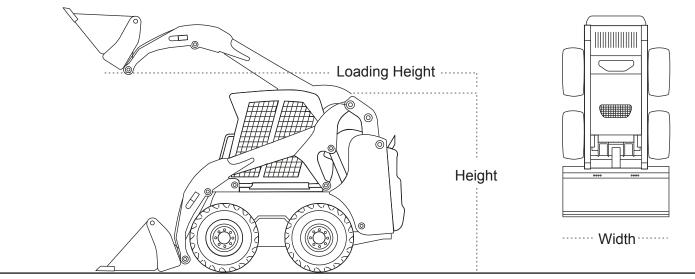

Transport	Lenath	
Hansport	LCHARL	

	Height (mm)	Transport Length (mm)	Width (mm)	Bucket Volume (m3)	Loading Height (mm)
Small	1860	2800	1150	0.2	2000
Medium	2000	3500	1550	0.4	2400
Large	2400	3700	1900	0.6	2600

ADDITIONAL FUNCTIONS & ATTACHMENTS:

> 4-in-1 bucket The general bucket attachment with the ability to scrap and grab.

> Smudge bar Used for spreading and levelling material.

> Hydraulic augers Used for drilling applications, diameter widths range from 150mm to 600mm diameter, and varying depths.

> Broom attachment Used for general debris clean up around site on sealed surfaces such as concrete or asphalt.

> Profiler Used to strip hardened surfaces (such as asphalt) to a preset level.

> Trencher Used for digging straight trenches for pipes and cables.

> Fork tynes Used for pallet loading applications.

> Road registration Enables the machine to operate across public roads.

* Equipment specifications are a guide only and may vary by year, make and model.

HEAD OFFICE

Eastern Plant Hire 358 Whitehorse Road Nunawading Victoria 3131 Australia

VISIT US

Office hours 6:00am – 6:30pm.
For emergency assistance outside of these times, call 03 8878 9111 to speak to our after hours representative.

CONTACT US

T 03 8878 9111 F 03 8878 9100

E admin@ephgroup.com.au W easternplanthire.com

FOLLOW US

For latest news, social media & offers;





